

MORE POWERFUL THAN YOU IMAGINE

High-performance pocket flashlight



PD25
Max **550** Lumens

PD25

Max **550** Lumens



Fenix PD25 is more powerful than such a tiny flashlight seems. Equipped with Cree XP-L LED and intelligent drive circuit, the flashlight produces 550-lumen stunning output from a 16340 rechargeable Li-ion battery. It's also compatible with CR123A battery. Besides, a tactical tail switch for momentary-on function, a metal side switch on the head are all you need to control five outputs including strobe mode.


PD25

Max **550** Lumens



- ✦ Featuring Cree XP-L LED
- ✦ Optimum output-to-weight ratios
- ✦ Intelligent drive circuit
- ✦ Powered by one 16340 or CR123A battery

PD25
Max **550** Lumens

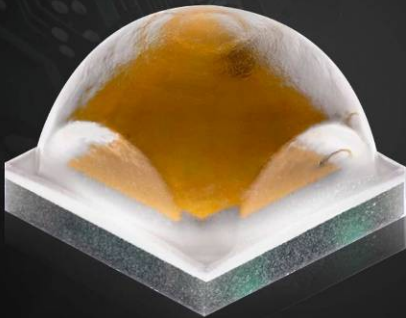

Featuring Cree XP-L LED

Provides up to 251% performance boost from the XP-G2 LED and is the first commercially available single-die LED to achieve breakthrough efficacy of up to 200 lumens per watt (LPW) at 350 mA.

Optimum output-to-weight ratios

Length: **93** centimeters (3.7 in.)

Diameter: **21.5** centimeters (0.8 in.)

Weight: **47** grams (1.65 oz) excluding battery

PD25
Max **550** Lumens



PD25

Max **550** Lumens

Optimum output-to-weight ratios

Featuring Cree XP-L LED and intelligent drive circuit, PD25 produces 550-lumen maximum output with beam distance up to 130 meters.





PD25
Max **550** Lumens

Intelligent drive circuit

Automatically recognizes the battery loaded and chooses the corresponding working mode to maximize the energy-efficiency of both rechargeable 16340 Li-ion battery and CR123A lithium battery.



Rechargeable 16340 Li-ion battery

Optimised for high drain applications
and provides 37.5% performance
boost in Turbo output.



CR123A lithium battery

With bigger capacity and better
low temperature performance,
provides extended runtime up to
100 hours in Low output.

PD25
Max **550** Lumens


Two power options

PD25

Max **550** Lumens

Four brightness levels

Give you the total command over output and runtime.

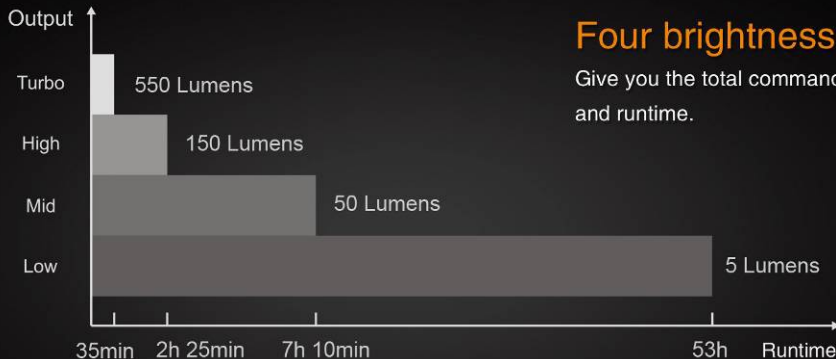


Powered by rechargeable 16340 Li-ion battery

PD25

Max **550** Lumens

Four brightness levels

Give you the total command over output and runtime.

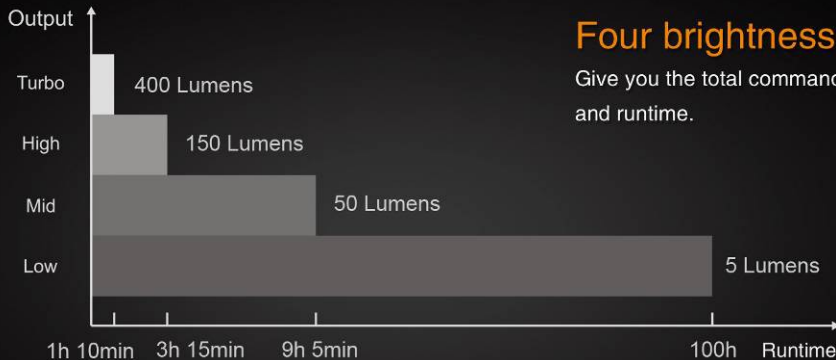

Powered by CR123A lithium battery

PD25

Max **550** Lumens

Strobe mode

For disorienting or signaling with
4225cd beam intensity



PD25

Max **550** Lumens



Tactical tail switch

Tap and hold for momentary-on,
press for constant-on.

Metal side switch ■

When the light is turned on,

- ✦ Press the switch to cycle through four brightness levels in the order of Turbo-Low-Mid-High.
- ✦ Press and hold the switch for 0.8 seconds to enter into strobe mode.

PD25
Max **550** Lumens



PD25


Max **550** Lumens

Digitally regulated
output-maintains constant
brightness

Reserve polarity protection
Guards against improper battery installation.

Intelligent memory
circuit
Automatically enters the previous
used brightness level when turned on.

Over-heat protection
To avoid high-temperature of the surface.

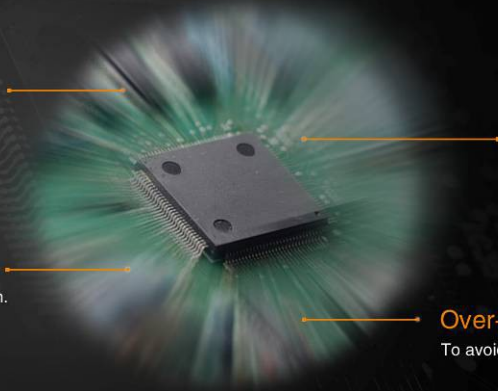

PD25
Max **550** Lumens



IPX-8 waterproof rating

Waterproof to 2 meters for 30 minutes

PD25

Max **550 Lumens**

ANSI/NEMA FL 1		Turbo	High	Mid	Low	Strobe
Output	CR123A	400 Lumens	150 Lumens	50 Lumens	5 Lumens	400 Lumens
	16340	550 Lumens	150 Lumens	50 Lumens	5 Lumens	550 Lumens
Runtime	CR123A	1h 10min	3h 15min	9h 5min	100h	/
	16340	35min	2h 25min	7h 10min	53h	/
Distance		130m (Max)				
Intensity		4225cd (Max)				
Impact resistant		1m				
Waterproof		IPX-8 (underwater 2 meters)				

The above-mentioned parameters (lab-tested by Fenix according to ANSI/NEMA FL1 standard using quality CR123A lithium battery and 16340 rechargeable Li-ion battery) are approximate and may vary between flashlights, batteries and environments.

PD25

Max **550** Lumens



- ✦ Utilizing Cree XP-L (V5) LED with a lifespan of 50,000 hours
- ✦ Powered by one 16340 rechargeable Li-ion or 3V CR123A Lithium battery
- ✦ 93mm (3.7 in.) Length × 21.5mm (0.8 in.) Diameter
- ✦ 47-gram weight (1.65 oz) excluding battery
- ✦ Digitally regulated output maintains constant brightness
- ✦ Low-voltage warning function to remind you to replace the battery
- ✦ Reverse polarity protection, to protect from improper battery installation
- ✦ Over-heat protection to avoid high-temperature of the surface
- ✦ Anti-roll, slip-resistant body design
- ✦ Tactical tail cap switch with momentary-on function
- ✦ Side switch on the head for output selection
- ✦ Made of durable aircraft-grade aluminum
- ✦ Premium Type III hard-anodized anti-abrasive finish
- ✦ Toughened ultra-clear glass lens with anti-reflective coating

PD25

Max **550** Lumens



Included in the package

- ✦ PD25 flashlight × 1
- ✦ Lanyard × 1
- ✦ Holster × 1
- ✦ Body clip × 1
- ✦ Spare O-ring × 1
- ✦ User manual × 1
- ✦ Warranty card × 1