



Compatible with 14500 rechargeable Li-ion battery

LD09 2015 Edition
Max 220 Lumens





- ✓ Compatible with 14500 rechargeable Li-ion battery
- ✓ Intelligent drive circuit for higher battery performance
- Exquisite and compact design
- Tactical tail switch





Rechargeable and environmentally friendly.



Compatible with 14500 rechargeable Li-ion battery

Optimized for high drain applications and provides up to 220-lumen in High output.



LD09 2015 Edition

Max 220 Lumens

Handy and compact, easy for carry.

Length: **94**mm (3.7in.)

Head diameter: 19mm (0.7in.)

Weight: 35 grams (1.2oz) excluding

battery






Tactical tail switch

for fast and easy operation.

- ✓ With the light off, tap the tail switch for momentary-on, tap again in 1 second to cycle through Low→Mid→High→SOS.
- ✓ Fully press the switch to turn on and lock the light, press again to unlock and turn off the light.



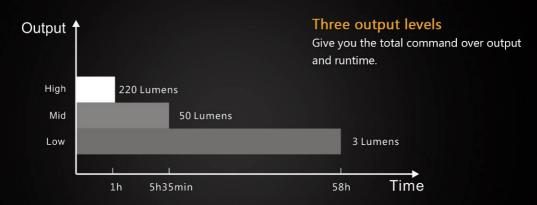

^{*}Powered by one 14500 rechargeable Li-ion battery.

Reserve polarity protection

Guards against improper battery installation

Over-heat protection

To avoid high temperature of the surface.

Digitally regulated output --maintains constant brightness.





Waterproof to IPX-8 standard, underwater 2 meters.

Other features

Tactical tail switch, supports tail-stand function



Made of durable aircraft-grade aluminum, Type III hard-anodized anti-abrasive finish

Anti-roll body design

Toughened ultra-clear glass lens with anti-reflective coating

ANSI/NEMA FL 1		High	Mid	Low	sos
Output	Ni-MH/Alkaline	130 Lumens	50 Lumens	3 Lumens	50 Lumens
	14500	220 Lumens			
Runtime	Ni-MH	1h 45min	8h 5min	70h	1
	Alkaline	50min	5h	43h	J.
	14500	1h	5h 35min	58h	1
Distance		120m (Max)			
Intensity		3600cd(Max)			
Impact Resistance		1m			
Beam Angle			70°		
Waterproof		IPX-8 (underwater 2m)			

Notice: The above-mentioned parameters (lab tested by using 2500mAh Ni-MH battery, included Alkaline battery and Fenix ARB-L14-800 14500 rechargeable Li-ion battery) are approximate and may vary between flashlights, batteries and environments.



- ✓ Utilizes Cree XP-E2 (R3) LED with a lifespan of 50,000 hours
- Powered by one 14500 rechargeable Li-ion battery or one 1.5V AA (Ni-MH/Alkaline) battery
- 🙀 94mm (3.7in.) length × 19mm (0.7in.) diameter
- 35 grams (1.2oz) excluding battery
- Intelligent drive circuit for higher battery performance
- Digitally regulated output maintains constant brightness
- Reverse polarity protection, to protect from improper battery installation
- Over-heat protection to avoid high temperature of the surface
- ▼ Tactical tail switch for one-key operation
- ✓ Made of durable aircraft-grade aluminum
- ✓ Premium type III hard-anodized anti-abrasive finish
- Toughened ultra-clear glass lens with anti-reflective coating



Included in the package

- ∠ LD09 flashlight × 1
- ✓ Lanyard × 1
- ¥ Body clip x 1
- ¥ Spare O-ring x 1
- ★ AA (Alkaline) battery × 1
- ✓ User manual × 1
- ¥ Warranty card x 1