




HIGH OUTPUT AND LONG RANGE BEAM A TRUE PERFORMER FOR HUNTING

The HT18 uses Cree XHP35 HI LED plus a large metal glossy reflector to deliver a maximum beam distance of 1011 yards (925 meters) and a maximum 1500 lumens output; it is the best tool for long-distance prey searching and targeting.







DUAL FILTER ADAPTERS FOR NIGHT SEARCHING

Different animals have different sensitivity to various colors of light.

The corresponding color filter can be selected according to your hunting needs and effectively reduces the chance of spooking the targeted prey and improves your chances of night hunting success.



*Included a red and a green filter adpater with hole for lanyard.



5000mAh LARGE-CAPACITY BATTERY ENSURES ULTRA-LONG RUNTIME

The included Fenix ARB-L21-5000U rechargeable battery can be charged via its own USB Type-C port. The 5000mAh large-capacity battery ensures longer runtime and the ability of resisting low temperature, it is cost-efficient and environmentally friendly.

* The normal charging time is about 4 hours.

* With the ALF-18 battery holder, the 18650 Li-ion battery can also be used.









USB Type-C charging port



ACCURATE BATTERY LEVEL INDICATOR READABLE CLEAR BATTERY STATUS

When the light is switched on, the battery level indicator inside the side switch will light up for 3 seconds to display the battery status.



The remaining battery level is indicated by the following:

Green constant on: 100% - 85%, saturated

Green flashes: 85% - 50%, sufficient

Red constant on: 50% - 25%, poor

Red flashes: 25% - 1%, critical

Note: This only works with Fenix ARB-L21 series 21700 rechargeable Li-ion battery and Fenix ARB-L18 series 18650 rechargeable Li-ion battery.





INSTANT ACTIVATION WITH THE TACTICAL TAIL SWITCH



TACTICAL TAIL SWITCH

Tap to momentarily turn on the light, release it and the light will go out; fully press to constantly turn on/off the light.



SIDE SWITCH

When the light is switched on, single click to select output level; press and hold for 0.8 seconds to enter strobe, single click again to return to general mode.

> *Tactical tail has withstood 100,000 press tests: the specification is the test result given by Fenix through its laboratory testing. Actual result may vary slightly according to different environments.



ALUMINUM BODY - TOUGH AND RELIABLE

The light body is made of high-strength A6061-T6 - rugged and reliable, and works well even when subjected to extreme conditions.

Additionally, it has withstood drop test of 1.5 meters on 6 sides.

* A6061-T6 is high-quality aluminum alloy produced by heat-treating and pre-stretching process. It is widely used in various industrial structural parts requiring a certain strength and high corrosion resistance, such as manufacturing trucks, tower buildings, ships, trams, railway vehicles, furniture machinery parts, precision machining, molds and so on.

*The 1.5 meters drop test result is given by Fenix through its laboratory testing.







TECHNICAL PARAMETERS

SIZE: 7.24" x 2.68" x 1.02"/ 184 x 68 x 26 mm WEIGHT: 7.76 oz / 220 g (excluding battery)

*The above specifications are the test results given by Fenix through its laboratory testing. Actual results may vary slightly according to the measurement method in the industry.

ANSI/PLATO FL1		Turbo	High	Med	Low	Strobe	
M.	2 Output	21700 Li-ion	1500 lumens	500 lumens	150 lumens	30 lumens	1500 lumens
3 5		18650 Li-ion	1100 lumens				1100 lumens
0	Runtime	21700 Li-ion	1 hour 40 minutes*	4 hours 15 minutes	20 hours 15 minutes	61 hours	- /
O .		18650 Li-ion	1 hour 40 minutes*	2 hours 50 minutes	14 hours 10 minutes	53 hours	
	Distance	21700 Li-ion	925 meters	570 meters	300 meters	160 meters	1
		18650 Li-ion	805 meters				
	Intensity	21700 Li-ion	214187 candela	80877 candela	21567 candela	6379 candela	1
		18650 Li-ion	162682 candela				
✓ Impact Resistance			1 meter				
~ ₩ Waterproof			IP68, 2 meters underwater				


Note: The above specifications are the test results given by Fenix through its laboratory testing using one Fenix ARB-L21-5000 and one Fenix ARB-L18-3500 rechargeable Li-ion battery under the temperature of 21±3°C and humidity of 50% - 80%. The true performance of this product may vary according to different working environments and the actual batteries used.

*The Turbo output is measured in total of runtime including output at reduced levels due to temperature or protection mechanism in the design.



INCLUDED



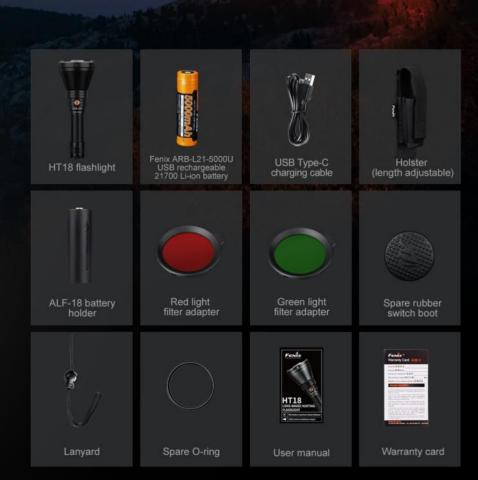

Package size: 5.20"x2.95"x8.19" / 132x75x208 mm

